



NO VENDOR SUPPLYING PARTS TO APPLIED COMFORT PRODUCTS' SPECIFICATIONS UNDER THIS DRAWING SHALL RECEIVE ANY PHYSICAL, DIMENSIONAL, MATERIAL OR PERFORMANCE CHARACTERISTICS OF SUCH PARTS AFTER APPLIED COMFORT PRODUCTS' APPROVAL OF SUCH VENDOR'S SAMPLES THEREOF UNLESS OTHERWISE AUTHORIZED IN WRITING BY APPLIED COMFORT PRODUCTS' PRODUCT ENGINEERING GROUP.




SECTION A-A

VIEW 'A'

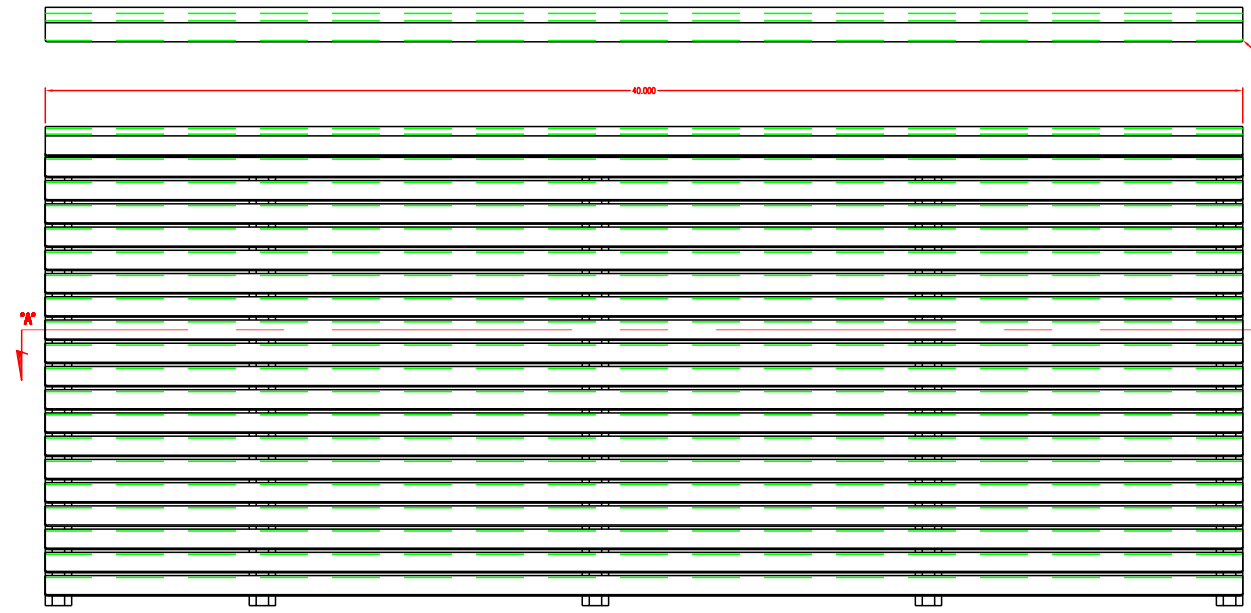

ALL LOWER CORNERS TO BE RADIUSD

10-24 INSERT PLACES

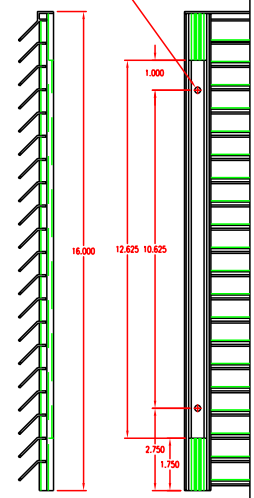

VIEW 'A'

- NOTES:
1. MATERIAL - ANODIZED EXTRUDED ALUMINUM
 2. EACH LOWER ASSEMBLY IS TO BE SUPPLIED WITH THE FOLLOWING MOUNTING HARDWARE:
FOUR (4) 10-24 x 1" LONG STUD (REQ'D FOR THREADED INSERT IN FRAME)
FOUR (4) 10-24 HEX NUTS
FOUR (4) 7/32" ID. FLAT WASHER
 3. LOWER BLADES HMG TO BE RADIUSD.

PART NO. 800952

00	12APR2004	ISS'D FOR PRODUCTION	S.S.	04007
REV./DATE	CHANGES		DRN/APPD.	ECN NO.

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. DO NOT SCALE DRAWING.
STANDARD TOLERANCE UNLESS OTHERWISE SPECIFIED
LINEAR - FRACTION ± 1/32"
LINEAR - DECIMAL ± .003
ANGULAR ± 1.5°

Applied
Comfort Products Inc.
CAMBRIDGE, ONTARIO, CANADA

PART NAME	LOUVER, PTAC (40" SLEEVE)
MAT'L	ANODIZED EXTRUDED ALUM.
DRW. S.S.	SCALE N.T.S.
APP'D.	DATE 12APR2004
SHEET #	1/1
REV. NO.	00
DRW. NO.	G-800952